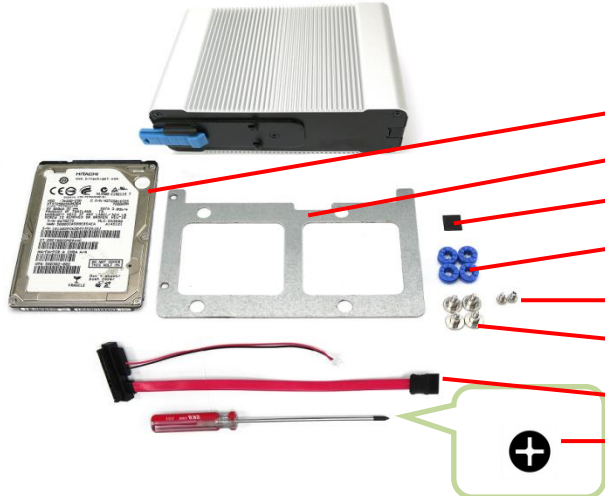
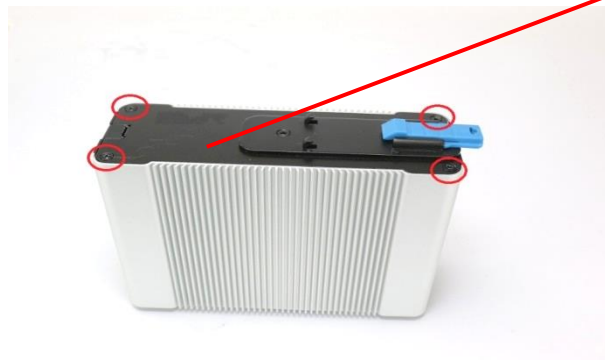



Installing Internal Devices on the DIN PC

Contents

Installing a 2.5" SATA HDD on the DIN PC	P2
Installing a SATA DOM on the DIN PC	P7
Installing a Wi-Fi Dongle on the DIN PC	P8
Installing an SD Card on the DIN PC	P10

Installing a 2.5" SATA HDD on the DIN PC


 <p>A collection of components for installing a 2.5" SATA HDD. From top to bottom: a silver HDD bracket, a 2.5" SATA HDD, a metal HDD bracket, a silicon pad sticker, four blue shockproof rings, two small screws, four shockproof screws, a SATA HDD cable, and a Phillips screwdriver. Red arrows point from each item to a numbered list on the right. A green box with a white plus sign is next to the screwdriver.</p>	<p>Step 1: Prepare the following items.</p> <ol style="list-style-type: none">1. 2.5" SATA HDD2. HDD Bracket3. Silicon pad sticker x 14. Shockproof ring x 45. Small screw x 26. Shockproof screw x 47. SATA HDD Cable8. Phillips screwdriver
 <p>A photograph of the front panel of a DIN PC. Four screws are circled in red, indicating they need to be removed. A red arrow points from the text 'Front panel' to the top edge of the panel.</p>	<p>Front panel</p> <p>Step 2: Unscrew the four screws on the front panel.</p> <p>Step 3: Remove the front panel.</p>
 <p>A photograph of the back panel of a DIN PC. Two screws are circled in red, indicating they need to be removed. A red arrow points from the text 'Back panel A cover' to the top edge of the panel.</p>	<p>Back panel A cover</p> <p>Step 4: Unscrew the two screws from the back panel to open the A cover.</p>



DIN PC after completing steps 2~4.




Place the Shockproof rings (x4) and Silicon pad (x 1) on the HDD Bracket.

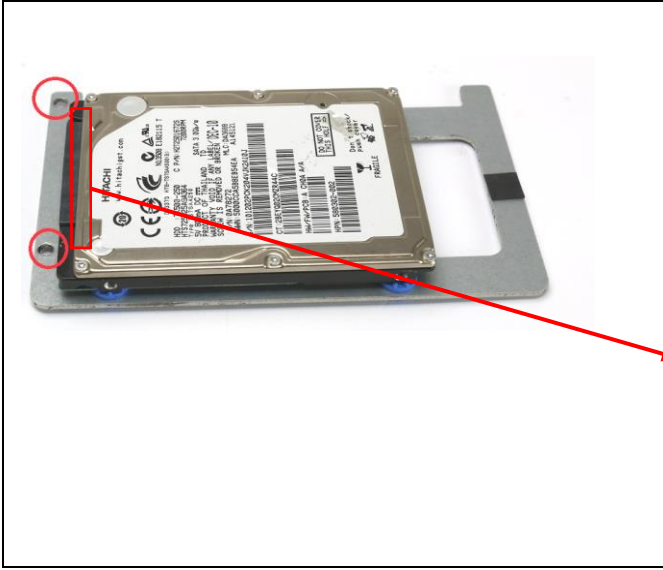


Step 5:
Place the 2.5" SATA HDD on the Shockproof rings of the HDD bracket.

Note: The HDD connector needs to be on the same side of the bracket as the two holes.

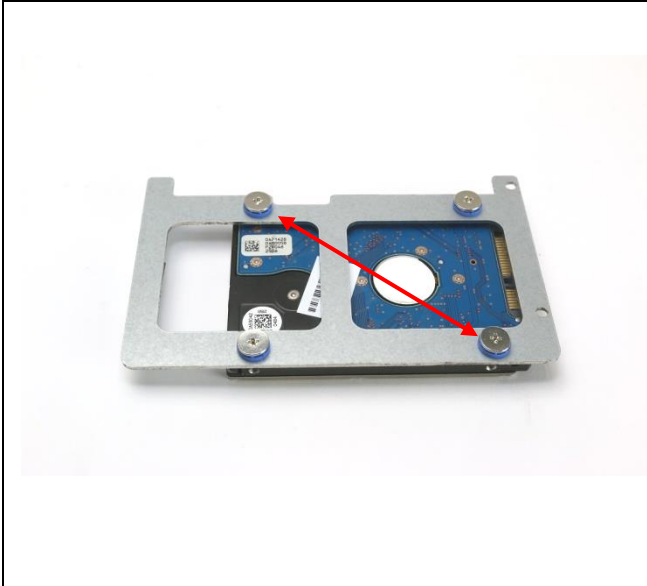


Step 6:
Flip the HDD and HDD bracket over. Tighten shockproof screws (x 4) onto the shockproof rings to affix the 2.5" HDD.

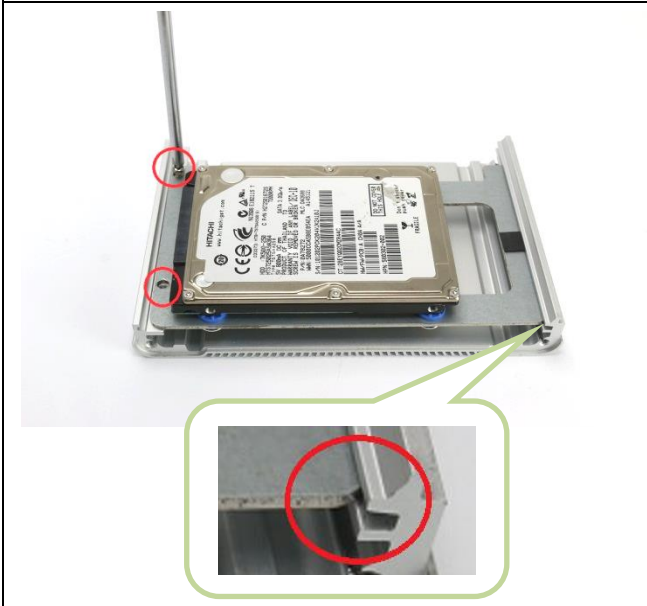


Step 7:
To place the HDD bracket on the **A cover**. Insert the HDD bracket onto the track of the **A cover**, (as shown in the picture).

Step 8:
Tighten small screws (x2) into the left of the HDD bracket.

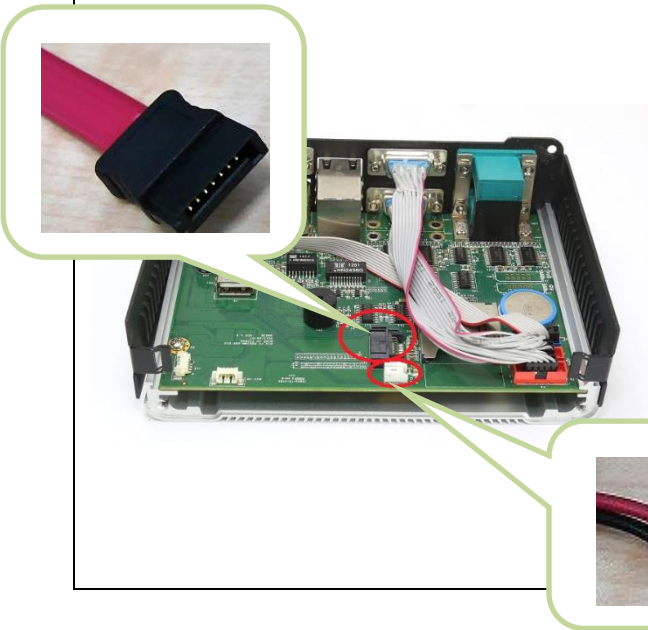


Step 9:
Connect the SATA HDD Cable and HDD power cable to the main board.

Note:
Pay attention to the direction of the HDD power cable.

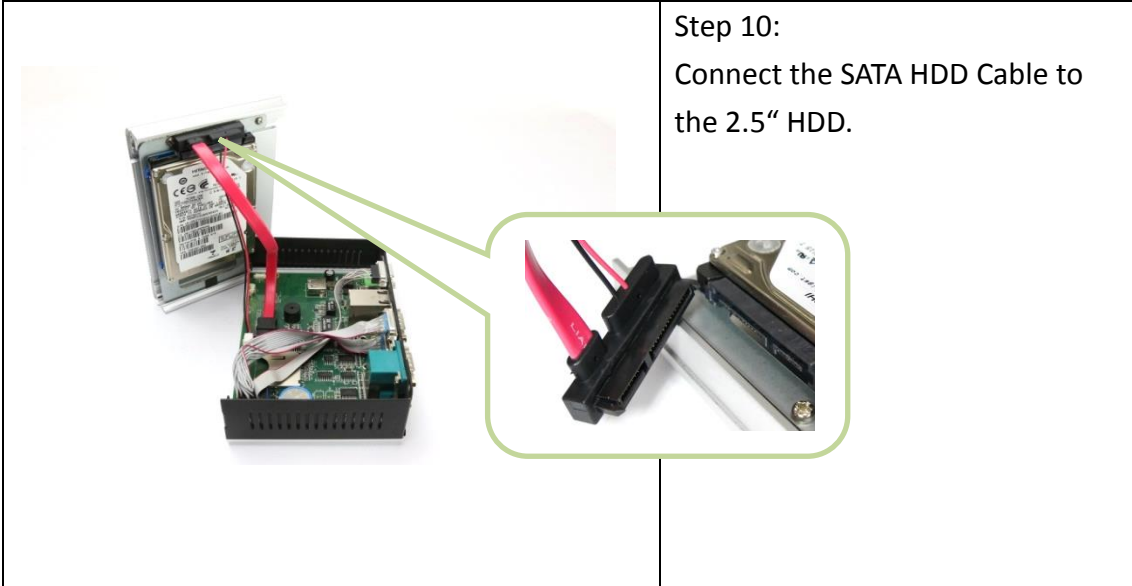


Step 10:
Connect the SATA HDD Cable to the 2.5" HDD.

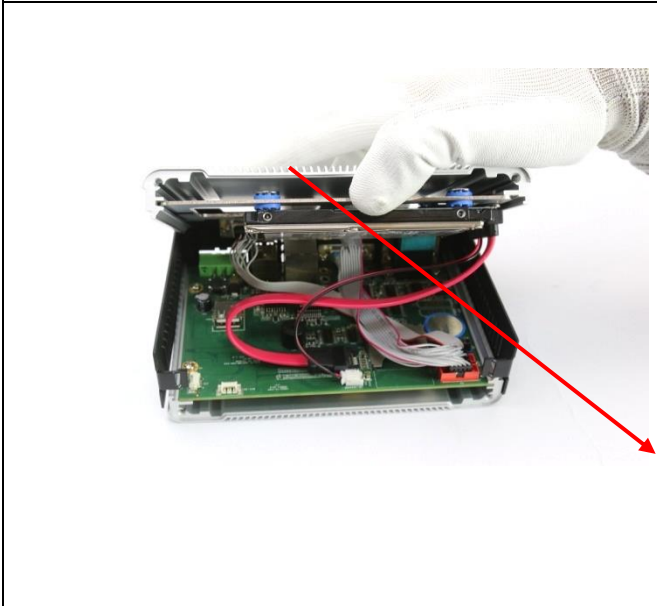


Step 11:
Cover up the **A Cover**.
Note:
Pay attention to ensuring that the HDD Cable (as shown) is not tangled.

A Cover

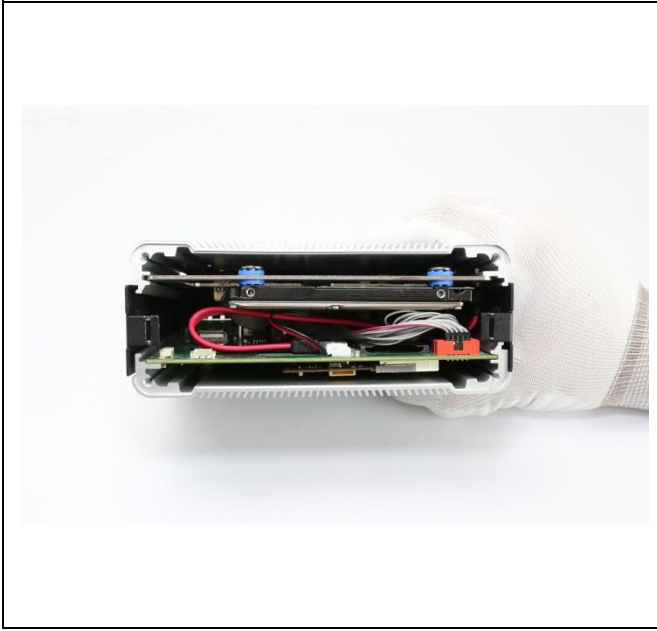


Note:
Side view of the DIN PC after the **A cover** has been attached.

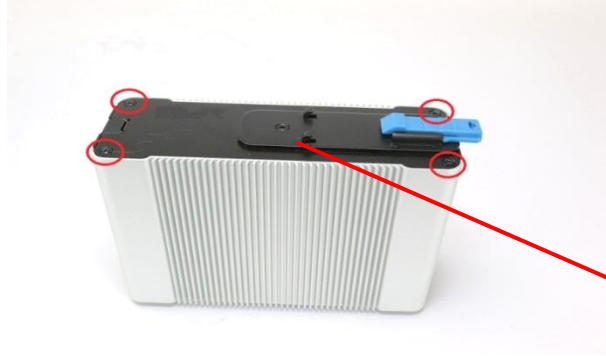


Step 12:
Put the **front panel** and tighten screws (x4).

Front panel



Step 13:
Tighten the two screws on the back panel.


Installing a SATA DOM on the DIN PC

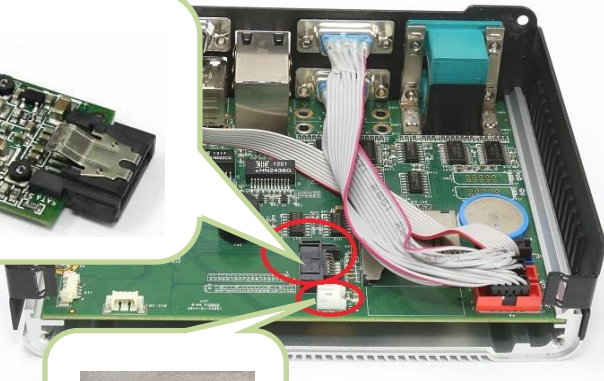

Step 1:

Plug the SATA DOM into the SATA connector on the main board.

Plug the SATA DOM power cable to the power connector.

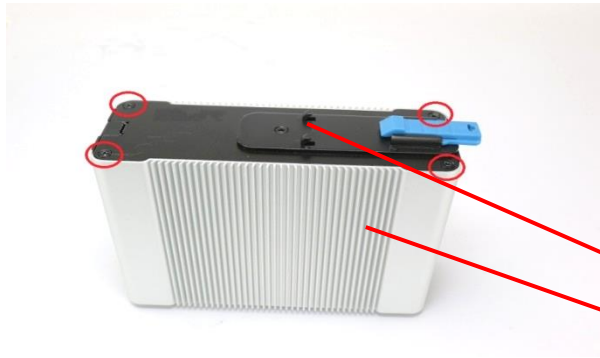

Step 2:

Put the **front panel** and **A cover** back on the unit.

Front panel
A cover



Step 3:

Tighten the two screws on the back panel.


Installing a Wi-Fi Dongle on the DIN PC



Step 1:


Prepare the following items.

1. Wi-Fi Antenna
2. USB Wi-Fi Dongle
3. Wi-Fi cable 150mm
4. Screw nuts

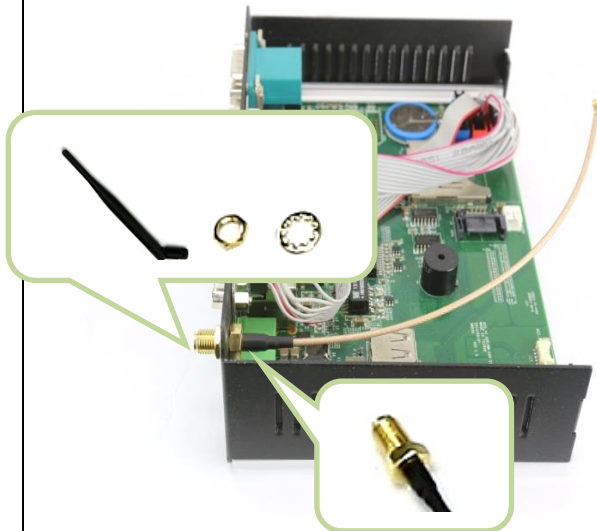


Step 2:

Attach the Wi-Fi cable onto the connector on the rear side of the DIN PC (as shown in the picture).

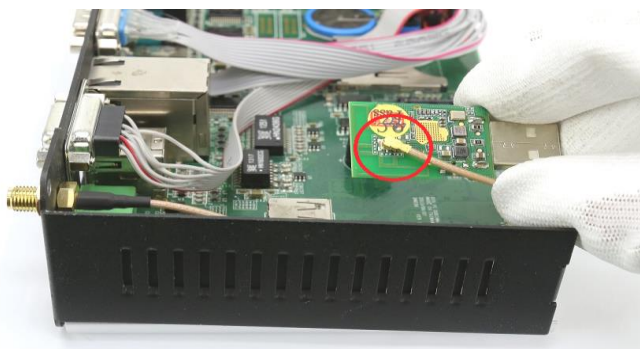


Step 3:

Connect the Wi-Fi 150mm cable onto the Wi-Fi Dongle.

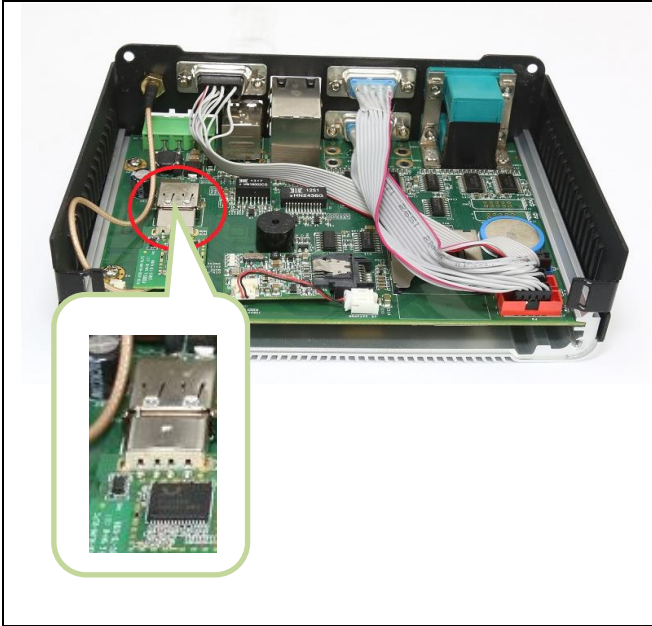

Step 4:
Plug the USB Wi-Fi Dongle to the USB port on the main board.

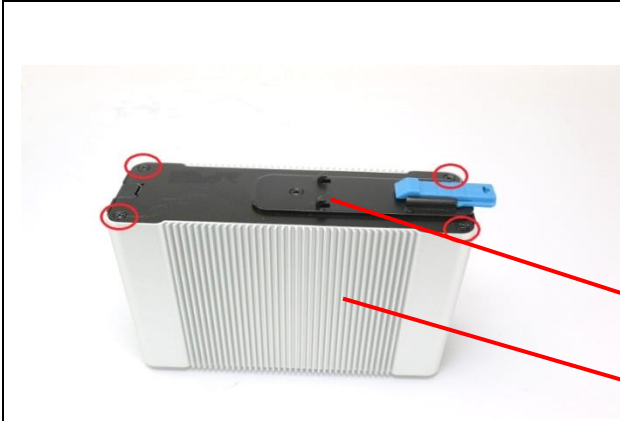

Step 5:
Put the **front panel** and **A cover** back on the unit.

Front panel
A cover




Step 6:
Tighten the two screws on the back panel.

Installing an SD Card on the DIN PC



Step 1:
Insert the SD Card into the
SD card slot.

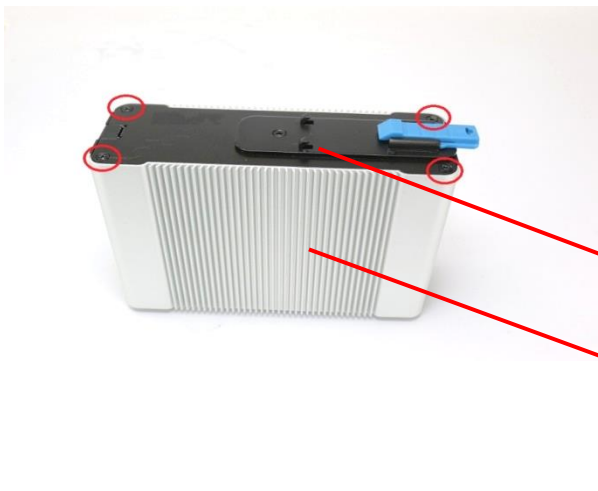

Step 2:
Put the **front panel** and **A cover**
back on the unit.

Front panel

A cover



Step 3:
Tighten the two screws on
the back panel.